
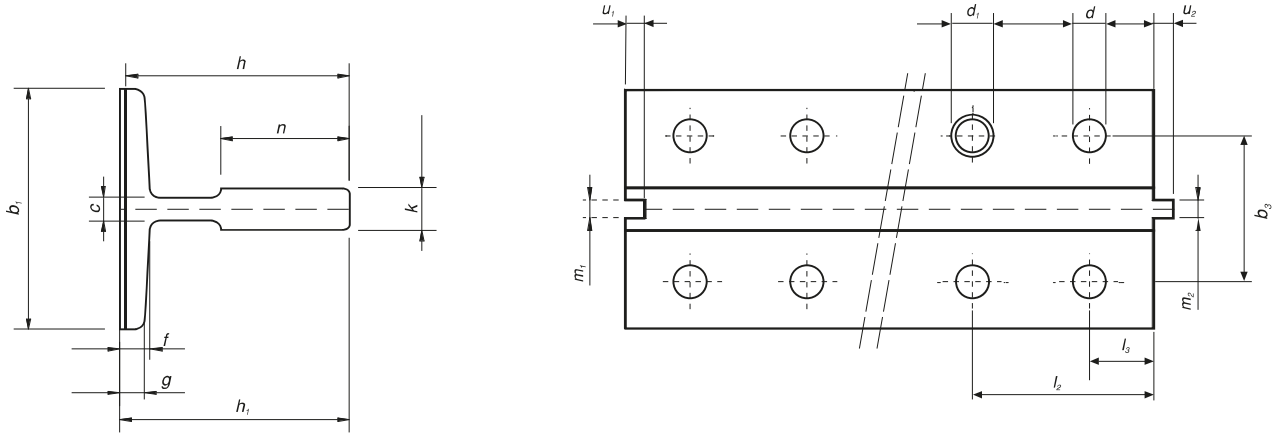



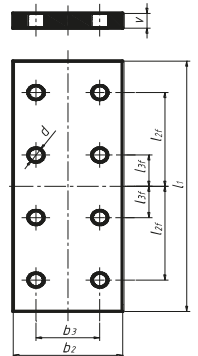
# MACHINED GUIDE RAILS / İŞLENMİŞ RAYLAR



Physical dimensions / Fiziksel ölçüler (mm)												
TS ISO 7465 Mart 2011	b <sub>1</sub>	h <sub>1</sub>	h	k	n	c	f	g	m <sub>1</sub>	m <sub>2</sub>	u <sub>1</sub>	u <sub>2</sub>
	Tolerances / Toleranslar											
	±1,5	±0,75	±0,1	+0,1 0	+3 0		±0,75	±0,75	+0,06 0	0 -0,06	±0,1	±0,1
T75/B	75	62	61	10	30	8	9	7	3,00	2,97	3,50	3,00
T89/B	89	62	61	16	34	10	11,10	7,90	6,40	6,37	7,14	6,35
T90/B	90	75	74	16	42	10	10	8	6,40	6,37	7,14	6,35
T125/B	125	82	81	16	42	10	12	9	6,40	6,37	7,14	6,35
T127-2/B	127	89	88	16	51	10	15,90	12,70	6,40	6,37	7,14	6,35

Technical Characteristics / Teknik özellikler									
TS ISO 7465 Mart 2011	S cm <sup>2</sup>	q <sub>1</sub> Kg/m	e cm	I <sub>x-x</sub> cm <sup>4</sup>	W <sub>x-x</sub> cm <sup>3</sup>	i <sub>x-x</sub> cm	I <sub>y-y</sub> cm <sup>4</sup>	W <sub>y-y</sub> cm <sup>3</sup>	i <sub>y-y</sub> cm
T75/B	10,91	8,564	1,861	40,29	9,287	1,921	26,47	7,06	1,557
T89/B	15,77	12,38	2,032	59,83	14,35	1,948	52,41	11,78	1,823
T90/B	17,25	13,54	2,612	102,0	20,86	2,431	52,48	11,66	1,744
T125/B	22,82	17,91	2,430	151,0	26,16	2,572	159,1	25,46	2,641
T127-2/B	28,72	22,55	2,478	201,7	31,17	2,640	229,9	36,20	2,829

Holes and Fishplates / Bağlantı pabucları (mm)								Cıvata		Tırnak	
TS ISO 7465 Mart 2011	d	l <sub>1</sub>	l <sub>2f</sub>	l <sub>3f</sub>	b <sub>2</sub>	b <sub>3</sub>	V	TS EN 4017	DIN 7168		
	Tolerances / Toleranslar										
		+3 0	±0,2	±0,2		±0,2	+3 0				
T75/B	13	250	105	25	70	42	10	M12x35	M2		
T89/B	13	305	114,3	38,1	90	57,2	13	M12x40	M3		
T90/B	13	305	114,3	38,1	90	57,2	13	M12x40	M3		
T125/B	17	305	114,3	38,1	130	79,4	18	M16x50	M4		
T127-2/B	17	305	114,3	38,1	130	79,4	18	M16x50	M5		



Management System  
ISO 9001:2015  
www.tuv.com  
ID 9105081237

STANDARTS/STANDARTLAR  
LENGHT/BOY  
PACKING/PAKET  
END PROTECTION/KORUMA  
STEEL/ÇELİK

TS ISO 7465 / Mart 2011  
5000mm ± 2mm / 2500mm ± 2mm  
Bundles 1000kg APPROX  
Coated by anti-corrosion oil to remove easilly with usual disolvents  
ISO 630 / E 275 B



- In keeping the rights to modify the specifications written in this page without notice.
- Bu sayfada yazılı olan spesifikasyonları bildirmsiz deęiřtirme hakkımız saklıdır.